



Parasource
Powered Series

PS10P

Overview

The most compact cabinet in the Parasource Series, the PS10P uses a high efficiency 10-inch woofer (with 2-inch voicecoil) to deliver extreme low end punch from as small a physical cabinet volume as possible. Wide 90° x 70° (H x V) conical horn delivers improved constant directivity and far better midrange response than competitive cabinets in this class.

Designed for maximum versatility, the PS10P works equally well as a Front-of-House cabinet, side fill cabinet or floor monitor. Innovative and highly efficient passive cooling scheme ensures the PS10P will operate in any environment without need of noisy internal dust collecting fans. Integrated reinforced flypoints ensure the PS10P can be flown quickly and easily in any fixed installation.

Integrated DSP ensures the PS10P can operate in any application without complex external processing. A simple one-button high pass filter switch rolls off low frequency material when PS10P is used with any Paralane Series or powered elite System subwoofer. Bass boost delivers remarkably improved bottom end response from the PS10P without cluttering midrange program or affecting the cabinet's overall intelligibility - making it the perfect small speaker solution for larger events where additional subwoofer support is not available.

Innovative multi-band limiting allows the cabinet to deliver maximum output and remarkably even frequency response while protecting the PS10P's speaker components. Unlike competitive powered cabinets, the Parasource Series multi-band limiting scheme ensures essential elements like vocals and solo instruments in the essential midrange band aren't being modulated by transient attacks of low frequency material like kick drums and bass tracks. This delivers an extremely smooth and precise mix even at the highest output levels the cabinet can produce.



Rugged yet lightweight ABS cabinet and baffle design ensure unmatched long term reliability in the field.





Features

- Integrated 1600 Watt Amplifier (Peak Power - 800 Watts Program)
- 10-inch Woofer with 2-inch Voicecoil
- 1-inch Compression Driver
- 90° x 70° Horn with Thermal and Peak Protection
- Max SPL 127dB Peak (124dB Continuous)
- High Efficiency Bi-Amplified Class-D Power Module
- Passive Cooling Scheme (No Loud Fans Required)
- Designed for Front-of-House or Monitor Applications
- Integrated Two Channel Mini Mixer with XLR Microphone, 1/4-inch and RCA Line Inputs
- Multiband Limiting Delivers Extremely Transparent Listening Experience (Vocals Are Not Modulated By Bass)
- Integrated All Metal Speaker Standmount Adaptor
- Integrated Reinforced Flypoints
- Lightweight ABS Cabinet Construction
- Made in Canada

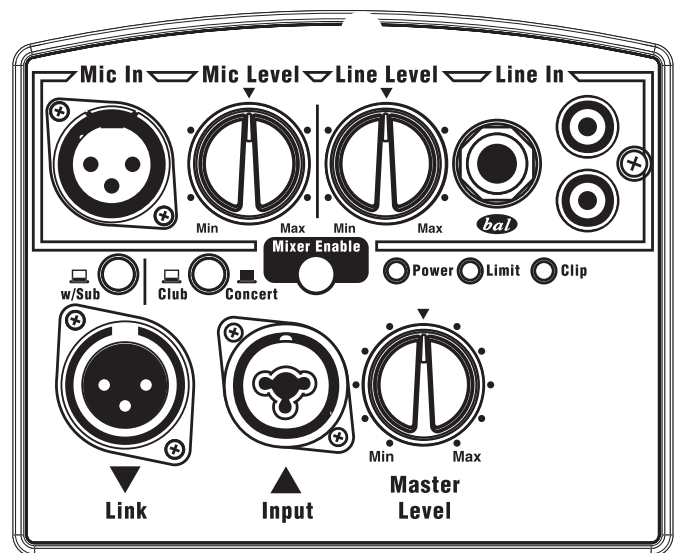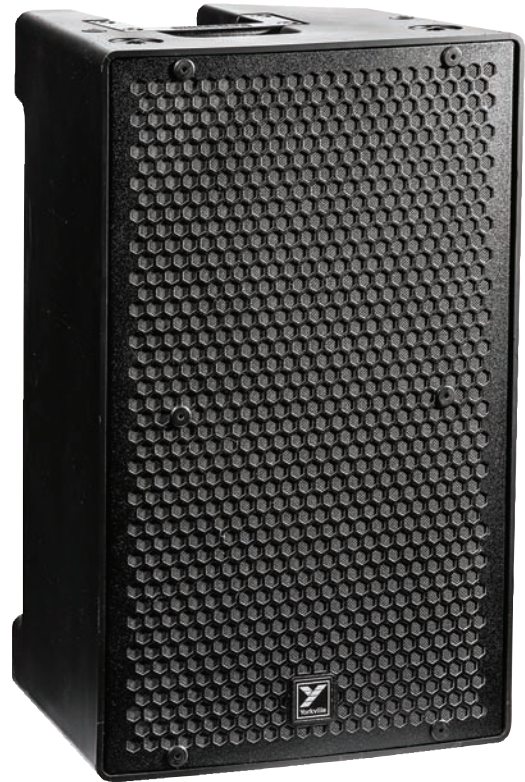

PS10P Rear Panel



Specifications

System Type	Active Loudspeaker
Active or Passive	Active
Program Power (Watts)	800 watts (1600 watts peak)
Max SPL (dB)	127dB Peak (124dB Continuous)
Frequency Response (Hz +/- 3dB)	55hz to 20kHz
Driver Configuration	10-inch / 1-inch
HF Dispersion (°H x °V)	90 x 70
HF Protection	Thermal/Peak Limiter
LF Driver(s)	10-inch Ceramic w/ 2-inch Voicecoil
LF Protection	Thermal/Multiband Peak Limiter
LF Processing	Dynamic Bass Extension
Cooling Scheme	Passive
Power Cable	Detachable IEC
Inputs	1/4-inch, XLR, RCA
Inputs - 1/4" Jacks	Yes (x2)
Inputs - XLR	Yes (x2)
Input Sensitivity (Vrms Sine)	1.23 Vrms +4dBu
Mixer Controls	Sub Mode HPF, Bass Boost, Mixer Enable
Level Controls	Master Level, Mic Level, Line Level
LED Indicators	Power, Limit, Clip
Bar Handles	Yes
Pole Mount Adapter (1 3/8"-3.5cm)	Yes
Enclosure Materials	ABS
Baffle Material	ABS
Grille	Perforated Metal
Dimensions (DWH xbackW, inches)	12 x 14 x 23
Dimensions (DWH xbackW, cm)	30.5 x 35.5 x 58.5
Weight (lbs/kg)	40 / 18.2

Specifications subject to change without notice