



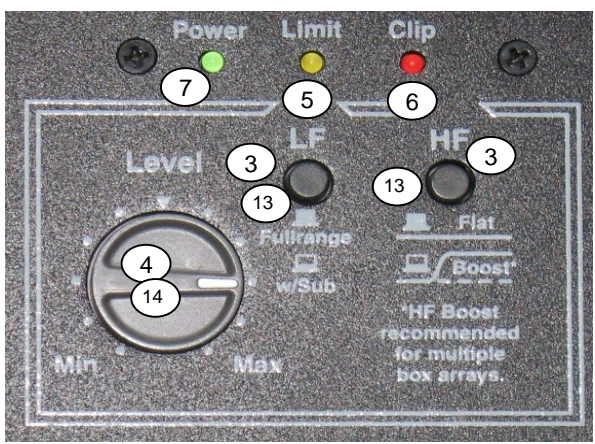

PSA1 Quick Guide

**Real Gear.
Real People.**

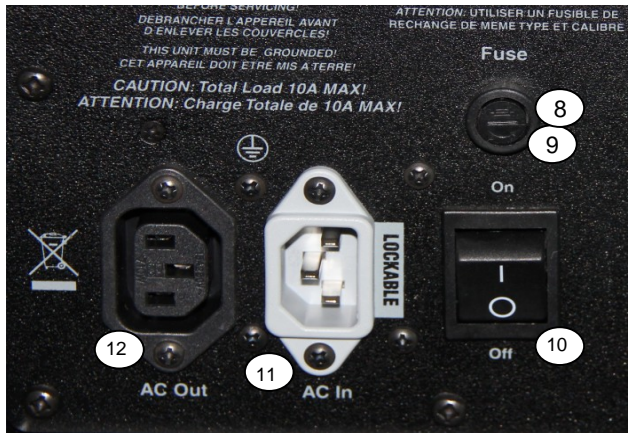

PART#	DESCRIPTION
1	3416 1/4"XLR PCB MT VERT COMBO <i>Input</i>
2	3453 XLR MALE PCB MT VERT <i>Link</i>
3	3522 DPDT MINI PC VERT SNP ALT <i>Full Range/Sub - Flat/Boost Switches</i>
4	4435 50K B LIN 9MM DETENT P3 <i>Level Control</i>
5	6400 YEL 3MM LED 1V9 6MA HIGHEFF <i>Limit L.E.D.</i>
6	6405 RED 3MM LED 2V0 20MA BRT <i>Clip L.E.D.</i>
7	6408 GRN 3MM LED 1V9 5MA FROSTED <i>Power L.E.D.</i>
8	2479 F5A 5X20MM FUSE
9	3413 LOWPROFILE FUSEHOLDER - 5X20MM
10	3587 DPDT ROKR SW 250"AC/PWR ON-OFF <i>Power Switch</i>
11	4088 IEC POWER V-LOCK INLET <i>A.C. In</i>
12	4126 IEC POWER OUTLET 15A/250VAC <i>A.C. Out</i>
13	8637 ROUND PUSH BUTTON 1/4" BLK 24MM <i>Full Range/Sub - Flat/Boost Knobs</i>
14	8653 LS701-801-2100 POINTER AT 12 KNOB <i>Level Control Knob</i>
15*	3074 POWER CORD 3M V-LOCK (N.A)
16	8205 PSA1 HANDLE PLATE METALPHOTO
17*	8933 1/4-20 INSIDE 7/16-20 UNF FLATALLE <i>Mounts handle to cabinet</i>
18	10014 NEW CAST HANDLE PSA1 CABINET
19	10017 1/4-20 PLASTIC BOLT CAP BLACK <i>Cover for bolt mounting handle</i>
20	9033 5/16"BUTTON HANDLE SS KWIK LOCK PI
21*	7393 8R 30W 1.00" DRIVER BMS
22*	7516 6" 8R 200WPGM SPKR NEO
23	8081 RUBBER FOOT 2.041"X.313" PSA1 SID
24	8082 RUBBER FOOT 1.8X1.265"FEMALE PSA1
25*	8083 RUBBER FOOT 1.8X1.265" MALE PSA1
26	8084 RUBBER FOOT 1.595" X .500" PSA1 BO
27	9036 ADAPTOR,SPEAKER STAND,PLAS,BLK

***NOT SHOWN**

